

For detecting special material gas leaks  
and monitoring factory environment

# Transportable Gas Detector

Model **TP-70D**

Model **TP-70DG** (Type with pyrolyzer heater)



## Detection Target Gas List

### TP-70D

| Detection target gas | Chemical formula               | Detection range |
|----------------------|--------------------------------|-----------------|
| Arsine               | AsH <sub>3</sub>               | 0 to 0.2 ppm    |
| Disilane             | Si <sub>2</sub> H <sub>6</sub> | 0 to 15 ppm     |
| Diborane             | B <sub>2</sub> H <sub>6</sub>  | 0 to 0.3 ppm    |
| Hydrogen selenide    | H <sub>2</sub> Se              | 0 to 0.2 ppm    |
| Phosphine            | PH <sub>3</sub>                | 0 to 1 ppm      |
| Germane              | GeH <sub>4</sub>               | 0 to 0.8 ppm    |
| Silane               | SiH <sub>4</sub>               | 0 to 15 ppm     |
| Ammonia              | NH <sub>3</sub>                | 0 to 75 ppm     |
| Hydrogen fluoride    | HF                             | 0 to 3 ppm      |
| Carbon monoxide      | CO                             | 0 to 75 ppm     |
| Hydrogen sulfide     | H <sub>2</sub> S               | 0 to 1 ppm      |
| Hydrogen chloride    | HCl                            | 0 to 6 ppm      |
| Chlorine             | Cl <sub>2</sub>                | 0 to 1.5 ppm    |
| Hydrogen             | H <sub>2</sub>                 | 0 to 2,000 ppm  |
| Isopropyl alcohol    | IPA                            | 0 to 2,000 ppm  |
| Methanol             | CH <sub>3</sub> OH             | 0 to 1,000 ppm  |
| Methane              | CH <sub>4</sub>                | 0 to 2.00 vol%  |
| Oxygen               | O <sub>2</sub>                 | 0 to 25 vol%    |

\*Please contact Riken Keiki for information on other gases.

### TP-70DG

| Detection target gas | Chemical formula | Detection range |
|----------------------|------------------|-----------------|
| Nitrogen trifluoride | NF <sub>3</sub>  | 0 to 30 ppm     |

## Features

- ✦ New intelligent sensors allow selection of the required detection target gas, ranging from special material gases to toxic gases, combustible gases, and oxygen.
- ✦ The large, easy-to-read LCD makes it easy to read off gas concentrations and check the pump operation status.
- ✦ Features a flow rate automatic adjustment function to reduce workloads for daily maintenance.
- ✦ The compact, transportable size allows connection to a commercial power supply (100 V to 240 V AC ±10 %) for detection anywhere.
- ✦ The detection target gas can be switched by replacing the sensor.

**RIKEN KEIKI Co., Ltd.**

# Model TP-70D/TP-70DG


## Specifications

|                                  |  |   |
|----------------------------------|--|---|
| Model                            | TP-70D   | TP-70DG   |
| Detection principle              | Pyrolyzer + Electrochemical type   |   |
| Detection target gas             | NF <sub>3</sub>  |   |
| Detection range                  | 0 to 30ppm   |   |
| Detection method                 | Pump suction type  |   |
| Suction flow rate                | 0.5 L/min ±10 %  |   |
| External output                  | 4 to 20 mA DC (non-insulated/load resistance not exceeding 300 Ω)  |   |
| Gas alarm                        | Two-step alarm (self-latching or auto-reset)   |   |
| External output contacts         | Gas alarm: One no-voltage contact each for 1st and 2nd alarms, de-energized in normal state (energized in alarm state) or energized in normal state (de-energized in alarm state)<br>Fault alarm: One no-voltage contact, de-energized in normal state (energized in alarm state) or energized in normal state (de-energized in alarm state) |   |
| Self-diagnostic function         | Flow rate abnormality, system abnormality, sensor abnormality  | Flow rate abnormality, system abnormality, sensor abnormality, pyrolyzer heater abnormality |
| Operating temperature range      | 0 °C to 40 °C (no sudden changes)  |   |
| Operating humidity range         | 30 to 70 %RH (no condensation)<br>(May vary depending on sensor unit mounted.)   | 30 to 70 %RH (no condensation)  |
| Displays                         | Gas name display/Flow rate display/Mode display  | Gas name display/Flow rate display/Mode display/<br>Pyrolyzer heater connection display     |
| Alarm indications                | Gas alarm: Lamp flashing or lit (red)/Intermittent or continuous buzzer<br>Fault alarm: Lamp lit (yellow)/Detail display/Continuous buzzer   |   |
| Power supply [Power consumption] | 100 V to 240 V AC ±10 %, 50/60 Hz [approx. 12 VA (max. 20 VA)<br>(May vary depending on sensor unit mounted.)]   | 100 V to 240 V AC ±10 %, 50/60 Hz [approx. 40 VA<br>(max. 45 VA)]                           |
| External dimensions              | Approx. 160 mm (W) × 210 mm (H) × 260 mm (D) (excluding projections)   |   |
| Weight                           | Approx. 4.3 kg   | Approx. 5.4 kg  |


## Accessories

- Protective rubber cap
- Dust filter
- Interference gas removal filter (depending on sensor unit)

## External view

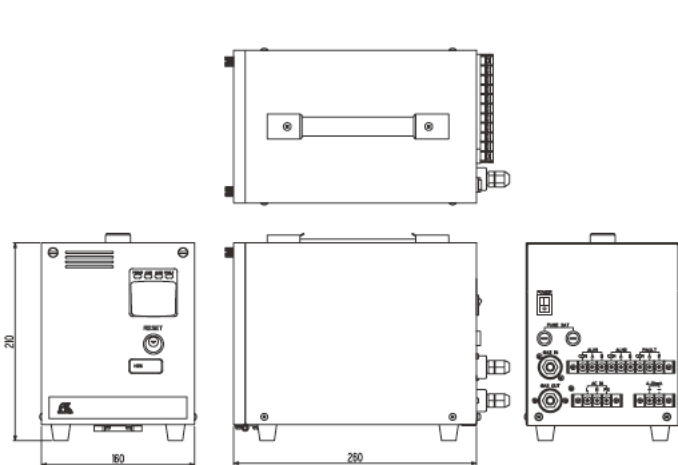

## Terminal plate diagram

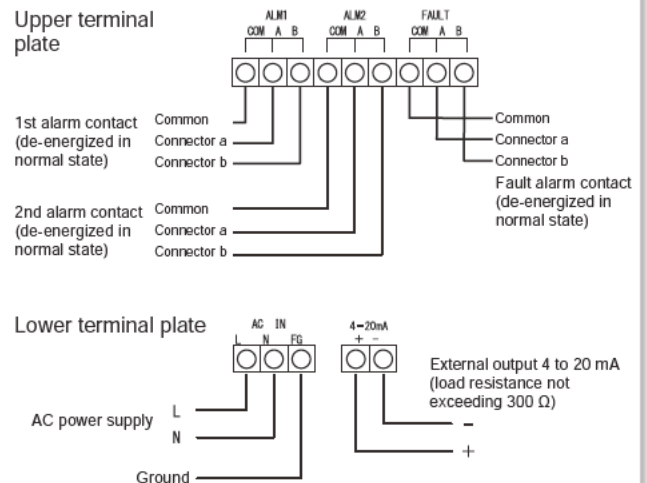

## RIKEN KEIKI Co., Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan  
 Phone : +81-3-3966-1113  
 Telefax : +81-3-3558-9110  
 E-mail : [intdept@rikenkeiki.co.jp](mailto:intdept@rikenkeiki.co.jp)  
 Web site : <https://www.rikenkeiki.co.jp/english>

\* The contents described in this catalog are subject to change without notice according to the performance improvement.

★ Distributed by: