



MODEL:
GX-9000



MODEL:
GX-9000H

Portable Multi Gas Detector
MODEL:

GX-9000 SERIES

Detects up to **6** different gas types simultaneously.

A single unit suitable for all kinds of marine/onshore/underground work situations.
Innovative new gas detector

- Detects up to six different gas types simultaneously (HC/CH₄/H₂, O₂, CO, H₂S, CO₂, NH₃, VOCs, etc.)
- Features a wide range of handy functions, including multilingual display and a combustible gas conversion function.
- Bluetooth® equipped! Easy data management via smartphone (option)

- Up to three-year sensor warranty
- Passes 1.5 m drop testing
- Protection rating equivalent to IP66/68

CE marking compliant
MED certified



RIKEN KEIKI Co., Ltd.

Portable Multi Gas Detector

MODEL:

GX-9000 SERIES



General-purpose type for measuring up to six different gas types

Model: GX-9000



High concentration H₂S type for measuring up to four different gas types

Model: GX-9000H

Allows switching between high concentration H₂S and other sensors to avoid poisoning of other sensors by high concentration H₂S.

LEDs on left and right light up to indicate selected mode at a glance. (High concentration H₂S measurement mode shown selected in example below)

Low concentration H₂S/other gas measurement mode and high concentration H₂S measurement mode

Easily selected using buttons



Next-generation high-performance sensor

Features "R Sensors" and "F Sensors"

Next-generation high-performance sensor offering smaller size and significantly better performance and durability than previous sensors




Simultaneous target gases

Max **6** types

Greater number of gases with a single unit

Allows simultaneous detection of multiple gases using a single-unit instead of requiring multiple gas detectors and detector tubes.

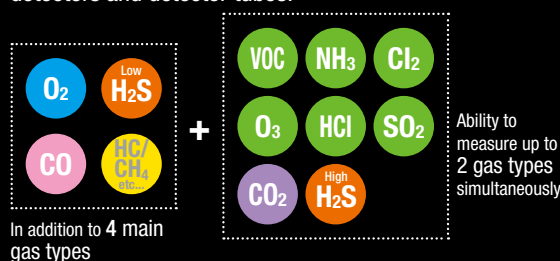

Sensor combinations Approx.

1000

Optimum solutions to suit customers' needs

Single unit measures up to six different gas types and detects CO₂ and a broad range of toxic gases, including VOC and NH₃. Ideal gas detector for customer needs.

Sensor warranty Max **3** years

Longer warranty for peace of mind

Utilizes R/F Sensor for outstanding long-term stability. Up to three-year sensor warranty*. Allows use with peace of mind.

* NH₃ sensor: two years; O₂/VOC sensor: one year


[Handy features for ease of use]

Choice of 16 different language displays

| | | | |
|--------------|----------|-------------|------------|
| English | French | Mandarin | Russian |
| Cantonese | German | (Simplified | Slovak |
| (Traditional | Italian | Chinese) | Spanish |
| Chinese) | Japanese | Polish | Turkish |
| Czech | Korean | Portuguese | Vietnamese |

USB Type-C charging and data transfer

Uses USB Type-C cable for both charging and PC interface. Recorded measurement data can be uploaded to PC software (sold separately), reducing the time required.

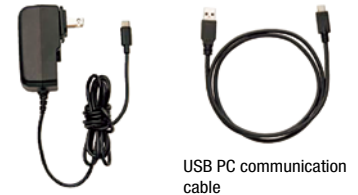

AC adapter for charging
USB PC communication cable (sold separately)

Combustible gas conversion function (when new ceramic type sensor is installed)

Models that include combustible gas among their detection target gases can be used to directly read off up to 27 different types of combustible gas.

*Available only with i-C₄H₁₀ and CH₄ models when using new ceramic type sensor, provided no thermal conductivity sensor is installed.

| Gas name | Display name | Conversion from i-C ₄ H ₁₀ models | Conversion from CH ₄ models |
|-----------|----------------------------------|---|--|
| Methane | CH ₄ | × | — |
| Isobutane | i-C ₄ H ₁₀ | — | ○ |
| Hydrogen | H ₂ | ○ | ○ |
| Methanol | CH ₃ OH | ○ | ○ |
| Acetylene | C ₂ H ₂ | ○ | ○ |
| Ethylene | C ₂ H ₄ | ○ | ○ |
| Ethane | C ₂ H ₆ | × | ○ |
| Ethanol | C ₂ H ₅ OH | ○ | ○ |
| Propylene | C ₃ H ₆ | ○ | ○ |

| Gas name | Display name | Conversion from i-C ₄ H ₁₀ models | Conversion from CH ₄ models |
|--------------|----------------------------------|---|--|
| Acetone | C ₃ H ₆ O | ○ | ○ |
| Propane | C ₃ H ₈ | × | ○ |
| Butadiene | C ₄ H ₆ | ○ | ○ |
| Cyclopentane | C ₅ H ₁₀ | ○ | ○ |
| Benzene | C ₆ H ₆ | ○ | ○ |
| n-hexane | n-C ₆ H ₁₄ | ○ | ○ |
| Toluene | C ₇ H ₈ | ○ | ○ |
| Heptane | n-C ₇ H ₁₆ | ○ | ○ |
| Xylene | C ₈ H ₁₀ | ○ | ○ |

| Gas name | Display name | Conversion from i-C ₄ H ₁₀ models | Conversion from CH ₄ models |
|------------------------|----------------------------------|---|--|
| n-nonane | n-C ₉ H ₂₀ | ○ | ○ |
| Ethyl acetate | EtAc | ○ | ○ |
| IPA | IPA | ○ | ○ |
| MEK | MEK | ○ | ○ |
| Methyl methacrylate | MMA | ○ | ○ |
| Dimethyl ether | DME | ○ | ○ |
| Methyl isobutyl ketone | MIBK | ○ | ○ |
| Tetrahydrofuran | THF | ○ | ○ |
| n-pentane | n-C ₅ H ₁₂ | ○ | ○ |

Alarm setpoint setting function

Use the setup program to change/edit settings. Supports management and operation in accordance with the customer's own criteria.

Confirmation beep function

Indicates that the gas detector is functioning normally. The buzzer sounds at preset intervals while measurement is underway.

Calibration notification function

Indicates the number of days until recommended regular maintenance when the power is turned on. Reminds the user to perform maintenance to ensure safe use.


[Outstanding durability for greater peace of mind]



1.5 m
Drop testing passed




Protection level
IP66/68
equivalent



Operating temperature range
-40 – +60 °C
(temporary use environment)

[Suitable for use even with large tanks! Features high-power pump]

Includes a high-power pump allowing use even for large tanks. Capable of aspirating and assessing gases from up to 45 m away using the optional sampling tube.



[Bluetooth® equipped!* Easy data management via smartphone]

Can communicate with smartphones via Bluetooth. The dedicated RK Link app can be used to store and email measurement results and easily manage data. A function also allows automated email generation to registered addresses when an alarm occurs to share details of emergencies remotely and in real time.



*Specify whether you require Bluetooth capability at the time of purchase.

Snap log button

Use the snap log button to save time/date/user/location/readings.

Date/User A/
Location A/Concentration: 50 %LEL

Date/User A/
Location B/Concentration: 25 %LEL
Date/User B/
Location C/Concentration:
0 %LEL

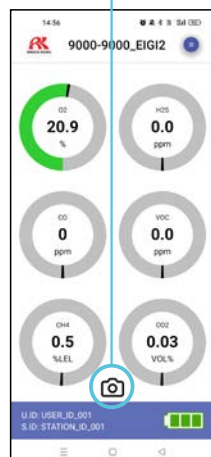


Save

| Detail Snapshot | |
|-----------------|-------------------------|
| Device Name | 9000Series |
| CapturedAt | 2023-04-03 14:36:15 |
| Position | 135.775786, 139.7002124 |
| Serial number | 9000_EIG12 |
| User ID | USER_ID_001 |
| Station ID | STATION_ID_001 |
| Component (O2) | 20.9 %/Normal |
| Component (H2S) | 0.0 ppm/Normal |
| Component (CO) | 0 ppm/Normal |
| Component (VOC) | 0.0 ppm/Normal |
| Component (CH4) | 0.5 %LEL/Normal |
| Component (CO2) | 0.03 VOL %/Normal |

Bluetooth and Bluetooth are registered trademarks of Bluetooth SIG, Inc. and used by Riken Keiki under license.

The 'RK Link' app can be downloaded from Google Play or Apple Store free of charge!

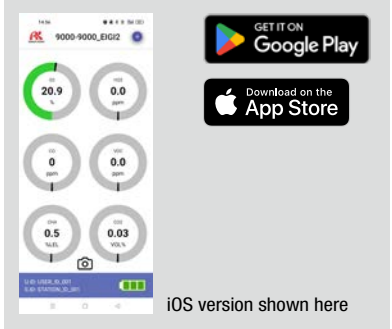

iOS version shown here

Google Play and the Google Play logo are trademarks of Google LLC.

Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc.

[Accessories]

Tubes/belts

Gas sampling rod

Part No.: 0904 0275 00

Gas sampling tube

(Gas sampling tube length: approx. 75 cm)


Part No.: 0914 0135 30

Shoulder strap

Part No.: 4777 4592 10



Appearance with accessories attached



For measurements in specific locations within reach

Batteries and other accessories

AC adapter

Part No.: 2594 1342 30

*Included with rechargeable battery models (converter plug (Type C) bundled with ATEX/IECEx models)



AA alkaline battery ×6

Part No. (×1): 2753 3007 80

*Included with dry battery models




Fresh air adjustment filters



Filter cylinder retaining belt for shoulder strap

Allows fresh air adjustment filter to be attached to shoulder strap.

Part No.: 4777 4572 20



*The particular type and whether or not the fresh air adjustment filter and filter cylinder retaining belt are included vary depending on the individual model.

[Optional accessories]

Tubes

Sampling tube with float

Gas can be separated from water and detected by a waterproof filter inside the float. Ideal for locations where water is present at the detection point

Tube length: 8 m

Part No.: 4384 0430 60

Tube length: 30 m

Part No.: 4775 9678 80

Tube length: 45 m

Part No.: 4777 9567 60



Ensures safety before gas elimination and tank cleaning work

For measurements inside tanks

Sampling tube with weight

The tube end is weighted to make it easier to lower. Ideal for use in narrow pipes and other confined locations.


*Requires use with absorbent cotton filter and connecting tube (except for models with ESF/PIF sensor installed).

Tube length: 30 m

Part No.: 4775 9679 50

Tube length: 45 m

Part No.: 4777 9465 80



Measuring gas concentrations inside cargo tanks

For measurements inside tanks

Batteries

Dry battery unit/AA alkaline batteries

Inserting batteries allows instant use in emergencies.

Dry battery unit

Part No.:

(Japanese explosion-proof models) 4777 9603 60

(ATEX/IECEx models) 4777 9605 10

AA alkaline batteries

Part No.: 2753 3007 80



Lithium ion battery unit/AC adapter

The battery unit can be recharged and used repeatedly. The AC adapter uses a USB Type-C connection.

Lithium ion battery unit

Part No.:

(Japanese explosion-proof models) 4777 9602 90

(ATEX/IECEx models) 4777 9604 30

AC adapter

Part No.: 2594 1342 30



Filter

Water trap

Connects between the sampling tube and gas detector to keep water out.

Part No.: 0904 0186 20



Absorbent cotton filter/Connecting tube

Tube connected to waterproof filter and gas detector

*Do not use if an ESF/PIF sensor is installed.

Absorbent cotton filter


Part No.: 4383 0850 00

Connecting tube

Part No.: 4775 9617 60

Absorbent cotton (replacement)

Part No.: 1879 0011 10



Diluter

Dilutes gas aspirated with air at a 1:1 ratio to allow use of new ceramic sensors with inert gases, gases ceramic sensors typically cannot detect.

*Due to explosion hazards, avoid use with highly concentrated combustible gases.

Part No.: 4775 9934 30



Case/holder

Leather case

Protects the product against dirt. Used to attach shoulder strap, waist belt, and absorbent cotton filter

Part No.: 4777 4593 80



Waist belt and waist belt attachment

Allow a gas detector to be worn close to the body.
*We recommend using in conjunction with the shoulder strap to prevent the gas detector dropping.

Waist belt

Part No.: 4775 5653 40

Waist belt attachment


Part No.: 4775 9853 10



Filter cylinder retaining belt

Attaches to the gas detector; allows absorbent cotton filter to be attached to the gas detector. Allows the filter to be secured to the gas detector to keep it out of the way during measurements.

Part No.: 4777 9444 20



Sampling rod holder

Attaches to the shoulder strap; allows the gas sampling rod tip to be stowed.

Part No.: 4775 5651 00



Aluminum storage case

Houses the gas detector together with accessories and optional accessories, like sampling tubes.

Dimensions: Approx. 365 mm (W) × 236 mm (H) × 226 mm (D)*
Part No.: 4777 9579 00




Management software and cable

USB cable (1 m)

Connects the gas detector to a PC.
Used when using the software.

Part No.: 2440 2728 90

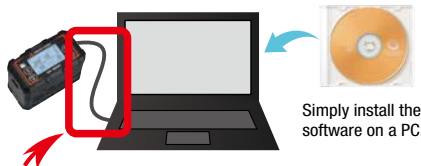


Simply install the software on a PC.

Data logger management program

Software used to view and manage measurement results and logs of events like alarms and calibrations

Part No.: (Japanese explosion-proof models) 9811 0980 90
(ATEX/IECEx models) 9811 0990 80

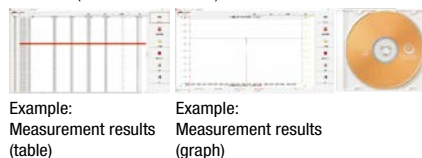


Example:
Measurement results
(table)

Example:
Measurement results
(graph)

Setup Program

Use the Setup Program for the GX-9000 Series to configure settings and edit a list of more than 600 different VOC sensor gases. This can be downloaded free of charge from the Riken Keiki website.



Easy management via PC

PID list

Maintenance parts and other items

Calibration gas

Used for bump test and gas adjustment

*Please contact Riken Keiki for more information.



Gas sampling bag

Used to draw the calibration gas into the gas detector. Available in a choice of three colors for easy differentiation when used with different gases

Part No.: 1L (green) 0904 0103 80
1L (orange) 0904 0104 50
2L (black) 0904 0288 10



Demand flow valve and connecting tube (10 cm)

Connect to a dedicated gas cylinder to supply the required amount of gas to the gas detector.


*Please contact Riken Keiki for details of the compatible gas cylinders.

Demand flow valve

Part No.: 1641 0190 20

Connecting tube (10 cm)

Part No.: 4775 5958 10



Adapter plug

The Type A AC adapter can be converted to Type C, O, or BF.

Part No.: (Type C) 2594 1435 00
(Type O) 2594 1434 20
(Type BF) 2594 1436 70



Protective film

(for LCD, set of 5)

Part No.: 4777 9025 70



Filters (replacement)

Please contact Riken Keiki for more information.

[Sensors]

Sensor selection

The GX-9000 accepts up to six sensors. The GX-9000H accepts up to five. Each of the three R sensors (R1 - R3) can be selected or unselected. One sensor (or no sensors) can be selected from each box in the table below for F sensors (F1 - F3).



| R sensor slots (same for GX-9000/GX-9000H) | | |
|--|---|--|
| R1 (slot 1) | R2 (slot 2) | R3 (slot 3) |
| <div></div> Oxygen | <div></div> Hydrogen sulfide [low concentration] | <div></div> Carbon monoxide |
| F sensor slots (upper: GX-9000 lower: GX-9000H) | | |
| F1 (slot 4) | F2 (slot 5) | F3 (slot 6) |
| <div></div> Toxic gas (electrochemical type) <div></div> VOC (PID) <div></div> Carbon dioxide <div></div> Hydrogen sulfide [high concentration] | <div></div> Combustible gas (thermal conductivity type) <div></div> Combustible gas (non-dispersive infrared type) | <div></div> Combustible gas (new ceramic type) <div></div> Combustible gas (non-dispersive infrared type) |


Combustible gas sensor selection

Three different types of combustible gas sensors can be installed: a new ceramic type, thermal conductivity type, and/or non-dispersive infrared type. Referring to the features below, select the sensors to suit the intended purpose.

| Detection principle | New ceramic type | Thermal conductivity type | Non-dispersive infrared type |
|---------------------|---|---|---|
| Detection range | %LEL | vol% | %LEL/vol% |
| Features | <ul style="list-style-type: none"> Detects H₂ Uses combustible gas conversion function | <ul style="list-style-type: none"> Detects H₂ | <ul style="list-style-type: none"> Detects even in inert gas Can be used even in environments where Si is present |

[Product code table]

Select a GX-9000 Series product based on the sensors needed, power supply type, Bluetooth functionality, and explosion-proof specifications. Refer to the product table below to select the desired specifications.

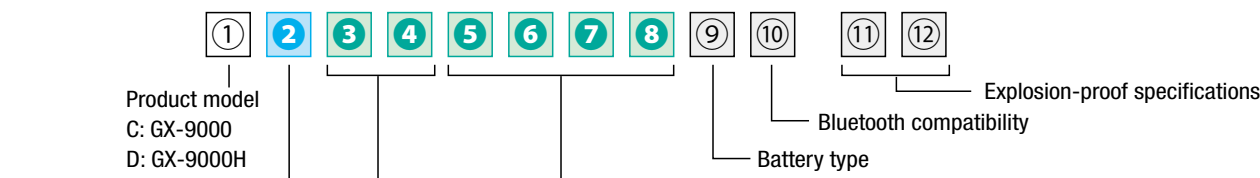

②: R sensor combination

| Symbol | R1 | R2 | R3 |
|--------|----------------------------|-----------------------------|---------------|
| | Sensor model | Sensor model | Sensor model |
| 0 | N/A | | |
| 1 | ESR-X13P (O ₂) | ESR-A13i (H ₂ S) | ESR-A13P (CO) |
| 2 | ESR-X13P (O ₂) | ESR-A13i (H ₂ S) | N/A |
| 3 | ESR-X13P (O ₂) | N/A | ESR-A13P (CO) |
| 4 | ESR-X13P (O ₂) | N/A | |
| 5 | N/A | ESR-A13i (H ₂ S) | ESR-A13P (CO) |
| 6 | N/A | ESR-A13i (H ₂ S) | N/A |
| 7 | N/A | N/A | ESR-A13P (CO) |

⑨: Battery type

| Symbol | Details |
|--------|-----------------------------------|
| L | Lithium ion battery unit BUL-9000 |
| D | Dry battery unit BUD-9000 |

⑩: Bluetooth functionality

| Symbol | Details |
|--------|--------------------------|
| 0 | Not Bluetooth compatible |
| 1 | Bluetooth compatible |

⑪⑫: Explosion-proof specifications

| Symbol | Details |
|--------|------------|
| 00 | Japan Ex |
| 50 | ATEX/IECEx |

③④: F sensor (F1) combination

| Symbol | F1 |
|--------|---|
| | Sensor model |
| 00 | N/A |
| P1 | PIF-001 (VOC) 10.6 eV, units: ppb |
| P2 | PIF-002 (VOC) 10.6 eV, units: ppm |
| P3 | PIF-003 (VOC) 10.0 eV, units: ppm |
| E1 | ESF-B242 (NH ₃) |
| E2 | ESF-C930 (Cl ₂) ^{*1} |
| E3 | ESF-B249 (O ₃) ^{*1} |
| E4 | ESF-A24E2 (HCl) |
| E5 | ESF-A24D4 (SO ₂) |
| R5 | IRF-4443 (CO ₂) ^{*2} |

*1 ②: ESR-A13i (H₂S) cannot be selected in R sensor combination.

*2 ⑤ - ⑧: Can be selected for F sensor (F2/F3) combination, only when NCF-6322P is installed for F3.

GX-9000H

| Symbol | F1 |
|--------|---|
| | Sensor model |
| E8 | ESF-A24R2 (high concentration H ₂ S) |

Sensor selection examples

* Four main gas types = Combustible gas/O₂/H₂S [low concentration]/CO

Example 1: Four main gas types + 1

$\text{CH}_4/\text{O}_2/\text{H}_2\text{S}/\text{CO}$
 +
 VOC (10.6 eV/ppm)
 +1

Combustible gas sensor:
New ceramic type + thermal conductivity type

Product code
First 8 characters: C1P2T1N1

| | | |
|----------------|--|---|
| O ₂ | Low H ₂ S | CO |
| VOC | Combustible gas (new ceramic type) CH ₄ | Combustible gas (thermal conductivity type) CH ₄ |

Example 2: Four main gas types + 2

$\text{HC}/\text{O}_2/\text{H}_2\text{S}/\text{CO}$
 +
 NH_3/CO_2
 +2

Combustible gas sensor:
Non-dispersive infrared type

Product code
First 8 characters: C1E1R2R5

| | | |
|-----------------|---------------------------------------|-----------------|
| O ₂ | Low H ₂ S | CO |
| NH ₃ | Combustible gas (new ceramic type) HC | CO ₂ |

Example 3: Main gas type + 2

O_2
 +
 $\text{VOC (10.6 eV/ppb)}/\text{CO}_2$
 +2

Combustible gas sensor:
N/A

Product code
First 8 characters: C4P100R5

| | | |
|----------------|---|-----------------|
| O ₂ | — | — |
| VOC | — | CO ₂ |

Example 4: Four main gas types + 1

$\text{HC}/\text{O}_2/\text{H}_2\text{S}/\text{CO}$
 +
 $\text{H}_2\text{S [high concentration]}$
 +1

Combustible gas sensor:
Non-dispersive infrared type

Product code
First 8 characters: D1E800R2

| | | |
|-----------------------|----------------------|---------------------------------------|
| O ₂ | Low H ₂ S | CO |
| High H ₂ S | — | Combustible gas (new ceramic type) HC |

Max. 1,000 ppm

All of these are examples. Examples 1 and 2 show sensors installed to full capacity. Note that fewer sensors can be installed. Different combinations of sensors can be installed. Refer to the 'Product code table' below to select sensors.

[Sensor specifications]

| R Sensor | | | | | | | |
|--------------------------------|-----------------------------|--------------------------|--|---|--|-------------------------|--|
| Detection target gas | | Oxygen (O ₂) | | Hydrogen sulfide (H ₂ S [low concentration]) | | Carbon monoxide (CO) | |
| Sensor model | | ESR-X13P | | ESR-A13i | | ESR-A13P | |
| Detection principle | | Electrochemical type | | | | | |
| Explosion-proof specifications | | Japan Ex | | ATEX/IECEX | | Japan Ex and ATEX/IECEX | |
| Display range | | 0 - 40.0 % | | 0 - 200.0 ppm | | 0 - 2,000 ppm | |
| Detection range | | 0 - 25.0 % | | 0 - 30.0 ppm | | 0 - 100.0 ppm | |
| Resolution | | 0.1 % | | 0.1 ppm | | 1 ppm | |
| Alarm setpoints*1 | First alarm | 18.0 % | | 19.5 % | | 1.0 ppm | |
| | Second alarm | 25.0 % | | 23.5 % | | 5.0 ppm | |
| | TWA | OFF | | 10.0 ppm | | 30.0 ppm | |
| | STEL | OFF | | 1.0 ppm | | 25 ppm | |
| Operating temperature range | Continuous use environment | OFF | | 5.0 ppm | | 200 ppm | |
| | Temporary use environment*2 | | | | | | |
| Operating humidity range | Continuous use environment | | | | | | |
| | Temporary use environment*2 | | | | | | |

| F sensor | | | | |
|-------------------------------|---|----------------------------|----------------------------|--|
| Detection target gas | Isobutane (i-C ₄ H ₁₀) | Methane (CH ₄) | Hydrogen (H ₂) | Acetylene (C ₂ H ₂) |
| Sensor model | NCF-6322P | | | |
| Detection principle | New ceramic type | | | |
| Display range/Detection range | 0 - 100 %LEL | | | |
| Resolution | 1 %LEL | | | |
| Alarm setpoints*1 | First alarm | 10 %LEL | | |
| | Second alarm | 50 %LEL | | |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C | | |
| | Temporary use environment*2 | -40 °C - +60 °C | | |
| Operating humidity range | Continuous use environment | 10 %RH - 90 %RH | | |
| | Temporary use environment*2 | 0 - 95 %RH | | |

| | | | |
|-------------------------------|---|----------------------------|----------------------------|
| Detection target gas | Isobutane (i-C ₄ H ₁₀) | Methane (CH ₄) | Hydrogen (H ₂) |
| Sensor model | TEF-7520P | | |
| Detection principle | Thermal conductivity type | | |
| Display range/Detection range | 0 - 100.0 vol% | | |
| Resolution | 0.1 vol% | | |
| Alarm setpoints*1 | First alarm | 25.0 vol% | |
| | Second alarm | 50.0 vol% | |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C | |
| | Temporary use environment*2 | -40 °C - +60 °C | |
| Operating humidity range | Continuous use environment | 10 %RH - 90 %RH | |
| | Temporary use environment*2 | 0 - 95 %RH | |

| | | |
|-------------------------------|---|----------------------------|
| Detection target gas | Isobutane (i-C ₄ H ₁₀) | Methane (CH ₄) |
| Sensor model | IRF-4345 | IRF-4341 |
| Detection principle | Non-dispersive infrared type | |
| Display range/Detection range | 0 - 100 %LEL/100 %LEL - 100.0 vol% | |
| Resolution | 0.5 %LEL/0.1 vol% | |
| Alarm setpoints*1 | First alarm | 10.0 %LEL |
| | Second alarm | 50.0 %LEL |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C |
| | Temporary use environment*2 | -40 °C - +60 °C |
| Operating humidity range | Continuous use environment | 10 %RH - 90 %RH |
| | Temporary use environment*2 | 0 - 95 %RH |

| | | |
|-------------------------------|---|---|
| Detection target gas | | Carbon dioxide (CO ₂) |
| Sensor model | | IRF-4443 |
| Detection principle | | Non-dispersive infrared type |
| Display range/Detection range | | 0 - 20.00 vol% |
| Resolution | | 0.01 vol% (0 - 5 vol%)/0.1 vol% (5 - 20 vol%) |
| Alarm setpoints ^{*1} | First alarm | 5.00 vol% |
| | Second alarm | 10.00 vol% |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C |
| | Temporary use environment ^{*2} | -40 °C - +60 °C |
| Operating humidity range | Continuous use environment | 10 %RH - 90 %RH |
| | Temporary use environment ^{*2} | 0 - 95 %RH |

| | | | | | | |
|--------------------------------|--|----------------------------|-----------------------------|-------------------------|-------------------------|-----------------------------------|
| Detection target gas | Hydrogen sulfide (H ₂ S (high concentration)) | Ammonia (NH ₃) | Chlorine (Cl ₂) | Ozone (O ₃) | Hydrogen chloride (HCl) | Sulfur dioxide (SO ₂) |
| Sensor model | ESF-A24R2 | ESF-B242 | ESF-C930 | ESF-B249 | ESF-A24E2 | ESF-A24D4 |
| Detection principle | Electrochemical type | | | | | |
| Explosion-proof specifications | Japan Ex and ATEX/IECEX | | | | | |
| Display range/Detection range | 0 - 1,000 ppm | 0 - 75.0 ppm | 0 - 1.50 ppm | 0 - 0.600 ppm | 0 - 6.00 ppm | 0.0 - 100.0 ppm |
| Resolution | 1 ppm | 0.5 ppm | 0.01 ppm | 0.005 ppm | 0.05 ppm | 0.1 ppm |
| Alarm setpoints*1 | First alarm | 1,000 ppm | 25.0 ppm | 0.50 ppm | 0.100 ppm | 2.0 ppm |
| | Second alarm | 1,000 ppm | 50.0 ppm | 1.00 ppm | 0.200 ppm | 5.0 ppm |
| | TWA | OFF | 25.0 ppm | 0.50 ppm | 0.100 ppm | 2.0 ppm |
| | STEL | OFF | 35.0 ppm | 1.00 ppm | OFF | 5.0 ppm |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C | -20 °C - +50 °C | 0 °C - 50 °C | 10 °C - 40 °C | -20 °C - +50 °C |
| | Temporary use environment*2 | -40 °C - +60 °C | -40 °C - +60 °C | -40 °C - +60 °C | 10 °C - 40 °C | -40 °C - +60 °C |
| Operating humidity range | Continuous use environment | 20 %RH - 90 %RH | 30 %RH - 80 %RH | 30 %RH - 80 %RH | 30 %RH - 80 %RH | 20 %RH - 90 %RH |
| | Temporary use environment*2 | 0 - 95 %RH | | | | |

| | | | |
|-------------------------------|---|---|--|
| Detection target gas | Volatile organic compounds (VOCs) | | |
| Sensor model | PIF-001 | PIF-002 | PIF-003 |
| Detection principle | Photoionization detector (PID) | | |
| Ionization energy | 10.6 eV | 10.6 eV | 10.0 eV |
| Display range/Detection range | 0 - 40,000 ppb | 0 - 4,000 ppm | 0 - 100.0 ppm |
| Resolution | 1 ppb (0 - 4,000 ppb)/ 10 ppb (4,000 - 40,000 ppb) | 0.1 ppm (0 - 400.0 ppm)/ 1 ppm (400.0 - 4,000 ppm) | 0.01 ppm (0 - 10.00 ppm)/ 0.1 ppm (10.00 - 100.0 ppm) |
| Alarm setpoints*1 | First alarm | 5,000 ppb | 5.00 ppm |
| | Second alarm | 10,000 ppb | 10.0 ppm |
| | TWA | OFF | OFF |
| | STEL | OFF | OFF |
| Operating temperature range | Continuous use environment | -20 °C - +50 °C | |
| | Temporary use environment*2 | -40 °C - +60 °C | |
| Operating humidity range | Continuous use environment | 10 %RH - 90 %RH | |
| | Temporary use environment*2 | 0 - 95 %RH | |

*1 Alarm setpoints: The above are default values. If a value is listed or OFF is listed, it can be set to any value using the setup program.

*2 Approx. 15 minutes.

[Product Specifications]

| Model | GX-9000 | | GX-9000H | |
|---|---|--|--|--|
| Concentration display | LCD digital (full dot) | | | |
| Detection target gas | Combustible gas (i-C ₄ H ₁₀ /CH ₄ /H ₂ /C ₂ H ₂), oxygen (O ₂), toxic gas (H ₂ S [low concentration]/CO/NH ₃ /Cl ₂ /O ₃ /HCl/SO ₂ /VOCs), carbon dioxide (CO ₂) | | Combustible gas (i-C ₄ H ₁₀ /CH ₄), oxygen (O ₂), Hydrogen sulfide (H ₂ S [low concentration] [high concentration]), carbon monoxide (CO) | |
| Detection method | Pump suction type | | | |
| Suction flow rate | Minimum 0.75 L/min (open flow rate) | | | |
| Display items | Clock, battery level, operating status | | | |
| Display languages | English, Cantonese (Traditional Chinese), Czech, French, German, Italian, Japanese, Korean, Mandarin (Simplified Chinese), Polish, Portuguese, Russian, Slovak, Spanish, Turkish, Vietnamese | | | |
| Buzzer volume | Approx. 95 dB (mean value at 30 cm from sound source) | | | |
| Gas alarm indication | Lamp flashing, continuous modulating buzzer sounding, gas concentration readout blinking | | | |
| Gas alarm pattern | Self-latching, auto reset | | | |
| Fault alarm/self-diagnosis | Flow abnormality, system abnormality, sensor abnormality, low battery voltage, calibration failure, clock abnormality | | | |
| Fault alarm icon | Lamp flashing, intermittent buzzer sounding, detail display | | | |
| Fault alarm pattern | Self-latching | | | |
| Communication specifications | USB 2.0 Type-C (for data logger/setting), Bluetooth 4.2 (Bluetooth Low Energy) | | | |
| Power source | Dedicated lithium ion battery unit (BUL-9000) or dedicated dry battery unit (AA alkaline batteries × 6) (BUD-9000) | | | |
| Continuous operating time ^{*1} | Lithium ion battery unit: Approx. 25 hours Dry battery unit: Approx. 12 hours (at 25 °C, no alarm, no lighting) | | Lithium ion battery unit: Approx. 35 hours Dry battery unit: Approx. 15 hours (at 25 °C, no alarm, no lighting) | |
| Operating temperature range ^{*2} | Approx. 15-minute temporary use environment: -40 °C - +60 °C (no sudden changes) Continuous use environment: -20 °C - +50 °C (no sudden changes) | | Approx. 15-minute temporary use environment: -40 °C - +60 °C (no sudden changes) Continuous use environment: -20 °C - +50 °C (no sudden changes) | |
| Operating humidity range ^{*2} | Approx. 15-minute temporary use environment: 0 %RH - 95 %RH (no condensation) Continuous use environment: 10 %RH - 90 %RH (no condensation) | | Approx. 15-minute temporary use environment: 0 %RH - 95 %RH (no condensation) Continuous use environment: 10 %RH - 90 %RH (no condensation) | |
| Operating pressure range | 80 kPa - 120 kPa (80 kPa - 110 kPa for explosion-proof range) | | | |
| Construction | Dustproof, waterproof construction equivalent to IP66/68 ^{*3} , drop resistant to 1.5 m | | | |
| Explosion-proof construction | Intrinsically safe explosion-proof construction, flame-proof enclosures (with new ceramic type sensor) Intrinsically safe explosion-proof construction (without new ceramic type sensor) | | | |
| Explosion-proof class | IECEx ^{*4} Ex da ia IIC T4 Ga (with new ceramic type sensor) Ex ia IIC T4 Ga (without new ceramic type sensor) | | ATEX ^{*4} II 1 G Ex da ia IIC T4 Ga (with new ceramic type sensor) II 1 G Ex ia IIC T4 Ga (without new ceramic type sensor) | |
| | Japan EX Ex da ia IIC T4 Ga (with new ceramic type sensor) Ex ia IIC T4 Ga (without new ceramic type sensor) | | | |
| Certifications | CE marking, MED, JIS T 8201:2010 (Oxygen deficiency indicator), JIS T 8205:2018 (Hydrogen sulfide indicator/alarm) | | | |
| External dimensions | Approx. 158 mm (W) × 85 mm (H) × 132 mm (D) (excluding projections) | | | |
| Weight ^{*5} | Approx. 1.1 kg | | Approx. 1.2 kg | |

^{*1} Continuous operating time: Varies depending on the sensor installed.

^{*2} Operating ambient temperature/humidity range: May vary depending on the sensor installed. Refer to 'Sensor Specifications' on P. 6.

^{*3} IPx8: No water penetration when submerged at depth of 2 m for 1 hour.

^{*4} Dry battery models when using Toshiba (LR6) or Duracell (MN1500) batteries: -40 °C to +40 °C: T4, -40 °C to +60 °C: T3.

^{*5} Including battery and battery unit.

RIKEN KEIKI Co., Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan

Phone : +81-3-3966-1113

Telefax : +81-3-3558-9110

E-mail : intdept@rikenkeiki.co.jp

Web site : <https://www.rikenkeiki.co.jp/english>

※The contents described in this catalog are subject to change without notice according to the performance improvement.

★ Distributed by: